

LED SPOTLIGHTS



**FIRE RATED FITTING
WITH GU10 SOCKET**



**FIRE RATED FITTING
WITH GU10 SOCKET
Adjustable**



**FIRE RATED FITTING IP65
WITH GU10 SOCKET**



SKU No.

OT5060 WHITE SHELL

OT5061 CHROME SHELL

OT5062 SATIN CHROME SHELL

IP Rating IP20

Dimension ϕ 85x110 mm




IP20



GU10

Socket



80 mm

SKU No.

OT5063 WHITE SHELL

OT5064 CHROME SHELL

OT5065 SATIN CHROME SHELL

IP Rating IP20

Dimension ϕ 85x130 mm

Adjustable



45°



GU10

Socket



80 mm

SKU No.

OT5066 WHITE SHELL

OT5067 CHROME SHELL

OT5068 SATIN CHROME SHELL

IP Rating IP65

Dimension ϕ 85x130 mm




IP65



GU10

Socket



80 mm

LED SPOTLIGHTS

OPTONICA



- Watts 6W
- Input Voltage AC:175-265V
- Flux 540 lm
- Beam Angle 40°
- CRI >80
- IP Rating IP65
- Life Span 25 000 h
- Dimension ϕ 84x67mm



With 3 magnetic replaceable covers

SKU No.

Neutral White
OT5042 4500K


Warm White
OT5041 2800K

Color temperature

A+
EQ.Watts:
6W=40W



FIRE RATED 6W SMD LED
Replaceable covers



EAN Code 4500K 3800156650428

EAN Code 2800K 3800156650411



- Watts 8W
- Input Voltage AC:175-265V
- Flux 570 -630lm
- Beam Angle 40°
- CRI >80
- IP Rating IP65
- Life Span 25 000 h
- Dimension ϕ 80x80mm



With 3 magnetic replaceable covers

SKU No.

White Light
OT5043 6000K


to
Warm White
3000K

Color temperature

A+
EQ.Watts:
8W=50W



FIRE RATED 8W COB LED PF>0.9
COLOR CHANGING LED 3000 to 6000K




COLOR CHANGING KNOB : 3000-4500-6000K

EAN Code 3000-6000K 3800156650435

LED DOWNLIGHTS



Watts	30W	CRI	>80
Input Voltage	AC:200-240V	IP Rating	IP20
Flux	2400 lm	Life Span	25 000 h
Beam Angle	90°	Dimension	235x146x140 mm



SKU No.
White Light
CB3230 6000K

Neutral White
CB3232 4500K

Warm White
CB3231 2800K

Color temperature

30W COB DOWNLIGHT RECTANGULAR

2400
LUMENS

90°
BEAM ANGLE

CUTTING SIZE

220x125 mm

ADJUSTABLE ANGLE

80°


IP20

EAN Code 6000K 3800156632301
EAN Code 4500K 3800156632325
EAN Code 2800K 3800156632318



WHITE BODY

Watts	5W	CRI	>80
Input Voltage	AC:185-265V	IP Rating	IP20
Flux	360 lm	Life Span	25 000 h
Beam Angle	38°	Dimension	φ86x54mm



SKU No.
White Light
CB3281 6000K

Neutral White
CB3282 4500K

Warm White
CB3283 2800K

Color temperature

5W COB DOWNLIGHT ROUND, ROTATABLE

360
LUMENS

38°
BEAM ANGLE

CUTTING SIZE

φ70 mm

ADJUSTABLE ANGLE

45°

IP20


EAN Code 6000K 3800156632813
EAN Code 4500K 3800156632820
EAN Code 2800K 3800156632837

LED DOWNLIGHTS

OPTONICA



Watts	8W	CRI	>80
Input Voltage	AC:200-240V	IP Rating	IP20
Flux	640 lm	Life Span	25 000 h
Beam Angle	60°	Dimension	φ95x55mm



SKU No.


White Light
CB3201 6000K

Neutral White
CB3206 4500K

Warm White
CB3202 2800K

Color temperature

8W COB DOWNLIGHT ROUND, ROTATABLE



EAN Code 6000K 3800156632011
EAN Code 4500K 3800156632066
EAN Code 2800K 3800156632028


SKU No.

White Light
6000K CB3203

Neutral White
4500K CB3205

Warm White
2800K CB3204


Color temperature



Watts	8W	CRI	>80
Input Voltage	AC:185-265V	IP Rating	IP20
Flux	640 lm	Life Span	25 000 h
Beam Angle	60°	Dimension	φ95x55mm



EAN Code 6000K 3800156632035
EAN Code 4500K 3800156632059
EAN Code 2800K 3800156632042




8W COB DOWNLIGHT ROUND, ROTABLE

LED DOWNLIGHTS

OPTONICA



⚡ Watts	8W	☀️ CRI	>80
⚡ Input Voltage	AC:200-240V	🌊 IP Rating	IP20
☀️ Flux	640 lm	🕒 Life Span	25 000 h
📐 Beam Angle	60°	📏 Dimension	100x100x70mm



A+

SKU No.

White Light
CB3207 6000K

Neutral White
CB3222 4500K

Warm White
CB3212 2800K

Color temperature

8W COB DOWNLIGHT SQUARE, ROTATABLE

640 LUMENS

60° BEAM ANGLE

φ80 mm CUTTING SIZE

45° ADJUSTABLE ANGLE

IP20

EAN Code 6000K 3800156632073
 EAN Code 4500K 3800156632226
 EAN Code 2800K 3800156632127


SKU No.

White Light
6000K CB3223

Neutral White
4500K CB3224

Warm White
2800K CB3225

Color temperature



A+

⚡ Watts	8W	☀️ CRI	>80
⚡ Input Voltage	AC:200-240V	🌊 IP Rating	IP20
☀️ Flux	640 lm	🕒 Life Span	25 000 h
📐 Beam Angle	60°	📏 Dimension	100x100x70mm



EAN Code 6000K 3800156632233
 EAN Code 4500K 3800156632240
 EAN Code 2800K 3800156632257

640 LUMENS

60° BEAM ANGLE

φ80 mm CUTTING SIZE

45° ADJUSTABLE ANGLE

IP20

8W COB DOWNLIGHT SQUARE, ROTATABLE

LED DOWNLIGHTS

OPTONICA



A+

SAVE
80%
ENERGY

IP20

20W



φ140 mm

1500
LUMENS

30W



φ165mm

2400
LUMENS

40W



φ200 mm

3200
LUMENS

LED COB DOWNLIGHT

SQUARE

CB3234 Neutral Light 4500K

CB3235 Neutral Light 4500K





CB3236 Neutral Light 4500K

20W COB DOWNLIGHT Rotatable

30W COB DOWNLIGHT

40W COB DOWNLIGHT

	20W COB DOWNLIGHT Rotatable	30W COB DOWNLIGHT	40W COB DOWNLIGHT
SKU No.	CB3234	CB3235	CB3236
Watts	20W	30W	40W
Input Voltage	AC:180-265V	AC:180-265V	AC:180-265V
Flux	1500 lm	2400 lm	3200 lm
Beam Angle	72°	90°	110°
Light Color	NW	NW	NW
CRI	>80	>80	>80
IP Rating	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h
Dimension			

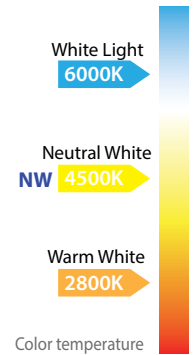

EAN Code 4500K

3800156632349

3800156632356


3800156632363

LED DOWNLIGHTS

OPTONICA



Watts	12W	CRI	>80
Input Voltage	AC:200-240V	IP Rating	IP20
Flux	960 lm	Life Span	25 000 h
Beam Angle	60°	Dimension	φ115x42mm



A+

SKU No.
White Light
CB3251 6000K

Neutral White
CB3252 4500K

Warm White
CB3253 2800K

Color temperature

12W COB DOWNLIGHT ROUND, ADJUSTABLE

960
LUMENS

60°
BEAM ANGLE

CUTTING SIZE
φ106 mm

ADJUSTABLE ANGLE
45°


IP20

EAN Code 6000K 3800156632516

EAN Code 4500K 3800156632523

EAN Code 2800K 3800156632530

SKU No.
White Light
6000K CB3254
Neutral White
4500K CB3255
Warm White
2800K CB3256
Color temperature



A+

Watts	12W	CRI	>80
Input Voltage	AC:200-240V	IP Rating	IP20
Flux	960 lm	Life Span	25 000 h
Beam Angle	60°	Dimension	115x115x42mm



EAN Code 6000K 3800156632547

EAN Code 4500K 3800156632554

EAN Code 2800K 3800156632561

960
LUMENS

60°
BEAM ANGLE

CUTTING SIZE
φ106mm

ADJUSTABLE ANGLE
45°

IP20


12W COB DOWNLIGHT SQUARE, ADJUSTABLE

LED DOWNLIGHTS

OPTONICA



Watts	25W	CRI	>80
Input Voltage	AC:200-240V	IP Rating	IP20
Flux	2200 lm	Life Span	25 000 h
Beam Angle	60°	Dimension	φ182x102mm



SKU No.

White Light
CB3241 6000K

Neutral White
CB3242 4500K

A+

Color temperature

25W COB DOWNLIGHT ROUND, ADJUSTABLE



LUMENS



BEAM ANGLE

CUTTING SIZE



φ160 mm



IP20

EAN Code 6000K 3800156632417


EAN Code 4500K 3800156632424

SKU No.

White Light
6000K CB3243

Neutral White
4500K CB3244

Color temperature



A+

Watts	35W	CRI	>80
Input Voltage	AC:200-240V	IP Rating	IP20
Flux	3000 lm	Life Span	25 000 h
Beam Angle	80°	Dimension	φ231×125mm



EAN Code 6000K 3800156632431

EAN Code 4500K 3800156632448



LUMENS



BEAM ANGLE

CUTTING SIZE



φ210 mm




IP20

35W COB DOWNLIGHT ROUND, ADJUSTABLE

LED DOWNLIGHTS

OPTONICA



15W		20W		30W	
	1200		1600		2500
φ155mm	LUMENS	φ165 mm	LUMENS	φ195 mm	LUMENS

LED COB DOWNLIGHT

TÜV

CB3270	White Light	6000K	CB3273	White Light	6000K	CB3276	White Light	6000K
CB3271	Neutral White	4500K	CB3274	Neutral White	4500K	CB3277	Neutral White	4500K
CB3272	Warm White	2700K	CB3275	Warm White	2700K	CB3278	Warm White	2700K

15W LED COB DOWNLIGHT

20W LED COB DOWNLIGHT

30W LED COB DOWNLIGHT

	15W LED COB DOWNLIGHT	20W LED COB DOWNLIGHT	30W LED COB DOWNLIGHT
SKU No.	CB3270/CB3271/CB3272	CB3273/CB3274/CB3275	CB3276/CB3277/CB3278
Watts	15W	20W	30W
Input Voltage	AC:180-265V	AC:180-265V	AC:180-265V
Flux	1200 lm	1600 lm	2500 lm
Beam Angle	145°	145°	145°
Light Color	WH/NW/WW	WH/NW/WW	WH/NW/WW
CRI	>80	>80	>80
IP Rating	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h
Dimension			



EAN Code 6000K	3800156632707
EAN Code 4500K	3800156632714
EAN Code 2800K	3800156632721

3800156632738
3800156632745
3800156632752


3800156632769
3800156632776
3800156632783

LED DOWNLIGHT

OPTONICA



Watts	40W	CRI	>80
Input Voltage	AC:200-240V	IP Rating	IP20
Flux	4000 lm	Life Span	25 000 h
Beam Angle	60°	Dimension	φ195x110mm



SKU No.

White Light
CB3260 6000K

Neutral White
CB3261 4500K

Color temperature

40W COB DOWNLIGHT TÜV

4000
LUMENS

60°
BEAM ANGLE

CUTTING SIZE

φ175 mm

IP20

EAN Code 6000K 3800156632608


EAN Code 4500K 3800156632615

SKU No.

White Light
6000K CB3262

Neutral White
4500K CB3263

Color temperature



Watts	60W	CRI	>80
Input Voltage	AC:200-240V	IP Rating	IP20
Flux	5600 lm	Life Span	25 000 h
Beam Angle	60°	Dimension	φ231×125mm



5600
LUMENS

60°
BEAM ANGLE

CUTTING SIZE

φ205 mm

IP20

EAN Code 6000K 3800156632622

EAN Code 4500K 3800156632639

60W COB DOWNLIGHT TÜV

